


This is the supplementary manual to provide customers the information of troubleshooting method, parts name, initial setting value, bundled items.

Parts

●Front

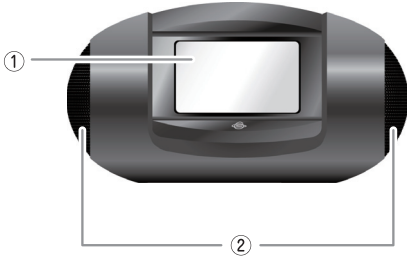

●Back



Name

① Liquid Crystal Panel	④ WAN port	⑥ USB port (For 3G USB adapter)
② Speakers	⑤ LAN port	⑦ miniUSB port (For PC connection)
③ Power connector		

Bundled item


Check if the below items are included in the package.

*If there is any broken or missing items, please contact our sales agency or PCI directly.

●MZK-WDPR (This product)



●AC Adapter



●LAN Cable



●Supplementary manual (This sheet)

●Start Guide (Separate sheet)



●Safety Instructions/Warranty Card



CD-ROM (manual) is not included in this product. For the detailed explanation, refer to the user's manual on the below webpage:
<http://www.planex.net/download/router/mzk-wdpr.htm>

Changing method for security information

Security information is registered in advance, we recommend customers to change the security information depending on customers' user environment.

- 1 Touch **[Setup]** from main menu of Liquid Crystal Panel.




- 2 Touch **[Network Setting]**




- 3 Touch **[Connection Setting]**

*If [Router Not Ready, Pls go back..] is shown, touch and start from 1 once again.




- 4 Touch **[Wi-Fi Setting]**



- 5 Set security information for wireless LAN.

For the security information, make sure you take notes.


- ① Enter SSID in half-width characters *within 32 letters
- ② Touch and select the authentication method for **[WEP]** or **[WPA2PSK]**
- ③ Enter the network key in half-width characters.



- *Enter the network key based on below.
 [If selected WEP in authentication method]
-5 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-Z, a-z].
-10 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-F, a-f].
-13 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-Z, a-z].
-26 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-F, a-f].
 [If [WPA2PSK] is selected for authentication method]
-64 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-F, a-f].
-8 to 63 Letters: Enter from Numbers [0 - 9],
 Alphabetical characters [A-Z, a-z].

- ④ Touch **[OK]**.

If you touch , the entry screen will be shown.
 *For the keyboard usage, refer to [How to use keyboard: on the [Start Guide].



- 6 If **[Setting successful]** is shown, it is the end of setting. Touch and go back to main.

*Depending on the environment, it may take a while to get to this.



If there is any device that wirelessly LAN connected at the default setting, try the wireless LAN setting once again.
 If you would like to complete the wireless LAN connection with refer to on Start Guide, connect with new network name (SSID) or network key.

